

SPL SEAL™ Aluminum Tape

(#96005)

1. Description

SPL SEAL™ Aluminum tape is easy to attach and remove and can be stored samples for short and long term. Aluminum tape can reduce cross-contamination of samples due to its high adhesion and can be used at -80 to 100 °C. It is ideal for using light-sensitive samples, and can be recovered of samples using a pipette without removing films. In addition, it is resistant to organic solvents such as DMSO.

2. Features

- ❖ Prevent evaporation and cross-contamination between wells
- ❖ Pre-cut, plate-sized sheets
- ❖ Non-sterile
- ❖ Working temperature range: -80 ~ 100 °C (#96005)
- ❖ DMOS resistant


3. Product Range

Cat. No.	Material	External Dimension (mm)	Color	Sterile	Packaging
96005	Aluminum/acrylate	141.00 x 79.00	Silver	-	100

4. Certification

SPL Life Sciences hereby certifies that the product identified above, inspected to be in compliance with product quality specification and requirements as documented in our ISO 9001:2015 Quality Management System (K-QA-Q031478) in Korea.

5. Product Photographs

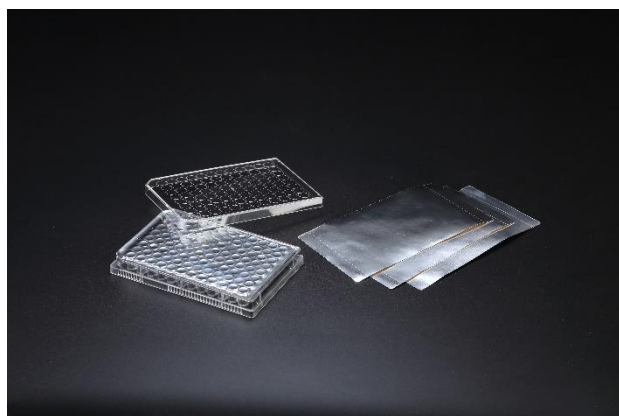


6. Specifications & Technical Drawing

(1) SPL SEAL™ Aluminum tape (#96005)

- Specifications

Dimensions		Material (Resin)	Packaging
Length	141.0 mm	<ul style="list-style-type: none"> Film: Aluminum adhesive: acrylate 	<ul style="list-style-type: none"> Pieces/Sleeve: 100 Pieces/Case: 100
Width:	79.0 mm		

- Technical Drawing

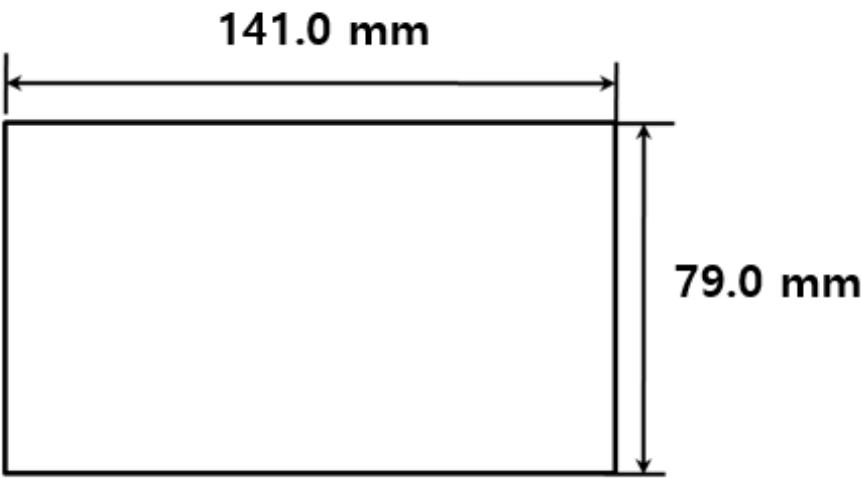

www.spllifesciences.com

For technical assistance, contact SPL R&D Center at:
 Tel: +82-31-533-4800; Fax: +82-31-533-1430; e-mail: spl@ispl.co.kr
 To place an order, contact your local distributor or
 Tel: +82-31-533-4800; Fax: +82-31-533-1430; e-mail: business@ispl.co.kr

SPL-TDS-SEALT

For Research Use Only. Not intended for use in diagnostic or therapeutic procedures.
 © SPL Life Sciences Co., Ltd., Version 2, November 20th, 2018

