SPL SEAL™ Pressure-sensitive Tape

(#96004)

1. Description

SPL SEALTM Pressure sensitive tape is designed for applications ranging from PCR and qPCR to ELISA, Storage, Protein Crystallization and cell culture. This sealing tape has separate sides for easy use and prevents evaporation of samples from 96 well tubes or plates during PCR. In addition, the sealing tape can be easily removed without leaving any residue. Pressure sensitive adhesive is not tacky to touch, but forms a strong bond to the plate upon application of pressure. They can be used in wide temperature ranges, making them suitable for many applications.

2. Features

- Prevent evaporation and cross-contamination between wells
- Film clarity allows for optical analysis during real-time PCR
- Pre-cut, plate-sized sheets
- Tight seals even with raised rims
- ❖ Working temperature range: -80 ~ +100 °C
- Non-sterile
- DNase, RNase-free

3. Product Range


Cat. No.	Material	External Dimension (mm)	Color	Sterile	Packaging
96004	PET/Silicone	143.00 x 79.00	clear	-	100

4. Certification

SPL Life Sciences hereby certifies that the product identified above, inspected to be in compliance with product quality specification and requirements as documented in our ISO 9001:2015 Quality Management System (K-QA-Q031478) in Korea.

5. Product Photographs



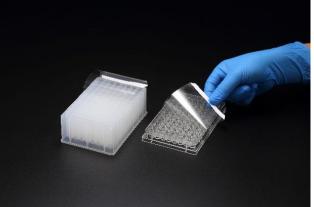




6. Specifications & Technical Drawing

- Specifications

Dimensions	Material (Resin)	Packaging
Length 143.00 mm Width: 79.00 mm	Film: polyethylene terephthalate(PET)adhesive: Silicone	Pieces/Sleeve: 100Pieces/Case: 100

- Technical Drawing

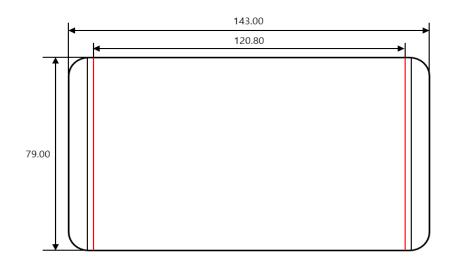

www.spllifesciences.com

For technical assistance, contact SPL R&D Center at:

 $\begin{tabular}{ll} Tel: +82-31-533-4800; Fax: +82-31-533-1430; e-mail: $$spl@ispl.co.kr \\ \end{tabular}$

To place an order, contact your local distributor or

Tel: +82-31-533-4800; Fax: +82-31-533-1430; e-mail: <u>business@ispl.co.kr</u>

SPL-TDS-SEALT

